

### MAIN FEATURES



Industry standard singleturn absolute encoder for factory automation applications.

- Optical sensor technology (OptoASIC)
- Programmable measuring range via teach-in function (external inputs or cover button)
- Power supply up to +30 VDC with analogue (voltage or current) electrical interface
- Cable or M12 connector output
- Blind hollow shaft up to 15 mm
- Mounting by stator coupling, torque stop slot or torque pin





ORDERING CODE	EAL	58F	16B	12/30	V	05	X	15	X	M12	R	.162	+XXX
<b>SERIES</b> analogue singleturn absolute encoder	EAL												
<b>MODEL</b> blind hollow shaft with stator coupling blind hollow shaft with torque stop slot blind hollow shaft with torque pin		58F 63F 63G											
<b>OUTPUT DAC RESOLUTION</b> 16 bit		16B											
<b>POWER SUPPLY</b> 12 ... 30 V DC		12/30											
<b>ELECTRICAL INTERFACE</b> voltage current		V I											
<b>OUTPUT RANGE</b> 0 ... 5 V 0 ... 10 V 0 ... 20 mA 4 ... 20 mA		05 010 020 420											
<b>OPTIONS</b> to be reported with voltage output / 3 wires current output 4 wires current output		X Q											
<b>BORE DIAMETER</b> mm mm diameters 6 / 8 / 9,52 (3/8") / 10 / 11 / 12 mm with optional shaft adapter, see Accessories		14 15											
<b>ENCLOSURE RATING</b> IP 65 shaft side / IP67 cover side IP 67		X S											
<b>OUTPUT TYPE</b> cable (standard length 1,5 m) preferred cable lengths 2 / 3 / 5 / 10 m, to be added after DIRECTION TYPE (eg. PR5) M12 plug connector		P M12											
<b>DIRECTION TYPE</b> radial		R											
<b>SOCKET</b> socket not included to be reported only with connector output (eg. M12R.162), for socket see Accessories		.162											
<b>VARIANT</b> custom version		XXX											

58F

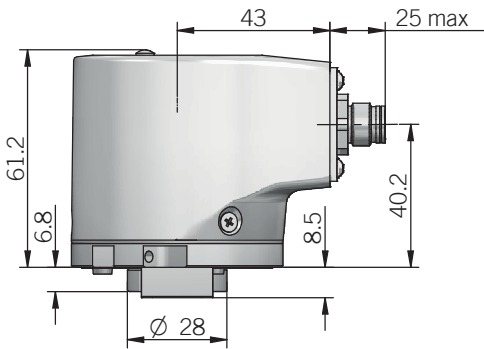
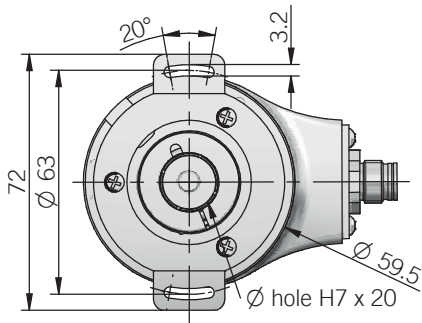


63F

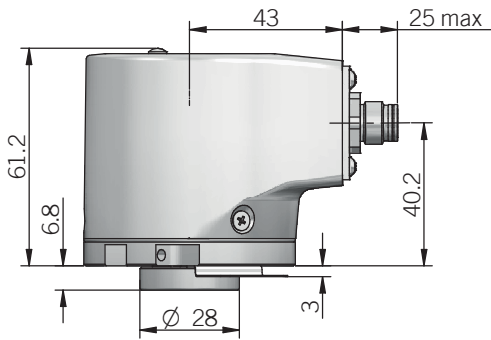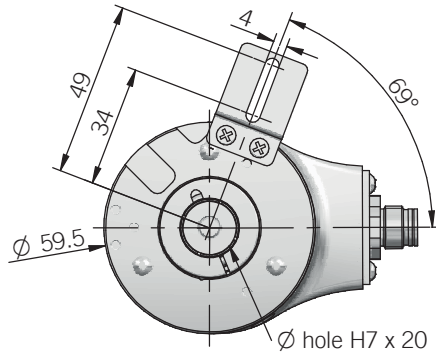

for torque pin please refer to Accessories

63 G

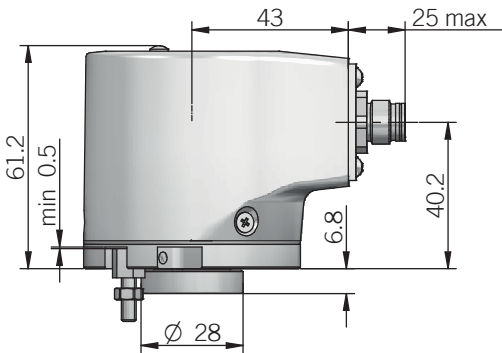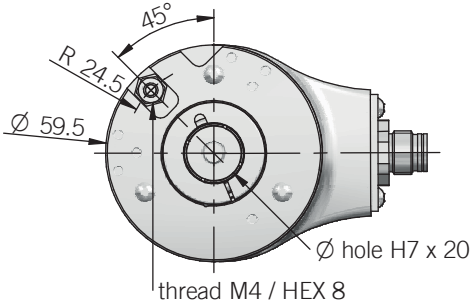


torque pin is included  
recommended mating shaft tolerance g6  
dimensions in mm


ELECTRICAL SPECIFICATIONS	
Resolution	16 bit
Output DAC resolution	16 bit
Minimum angle	22,5°
Power supply <sup>1</sup>	11,4 ... 30 V DC (reverse polarity protection)
Power draw without load	< 1 W
Electrical interface <sup>2</sup>	voltage (0 ... 5 V / 0 ... 10 V) current (0 ... 20 mA / 4 ... 20 mA)
Auxiliary inputs (BEGIN - END)	active high (+V DC) connect to 0 V if not used / $t_{min}$ 150 ms
Load	Rmin= 1 k $\Omega$ (voltage output) Rmax= (V DC - 2) / 0,02 (current output)
Output update frequency	16 kHz
Signal pattern	auto teaching according to commissioning
Start-up time	700 ms
Linearity error	$\pm 0,069^\circ$
Mean time to dangerous failure (MTTF <sub>d</sub> ) <sup>3</sup> according to EN ISO 13849-1	215 years
Mission time (Tm) <sup>3</sup>	20 years
Diagnostic coverage (DC) <sup>3</sup>	0%
Cable type	shielded - fixed installation conductors section 0,22 mm <sup>2</sup> / AWG 24 bending radius min 60 mm
Electromagnetic compatibility	according to 2014/30/EU directive
RoHS	according to 2011/65/EU directive
UL / CSA	file n. E212495

**ELECTRICAL INTERFACE**

**VOLTAGE OUTPUT**

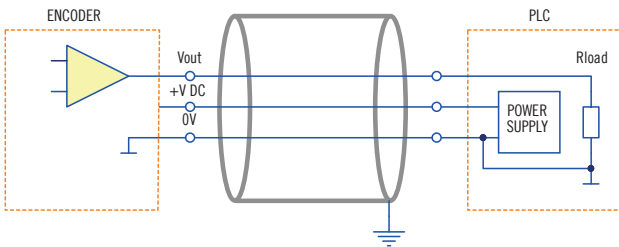

**CURRENT OUTPUT**

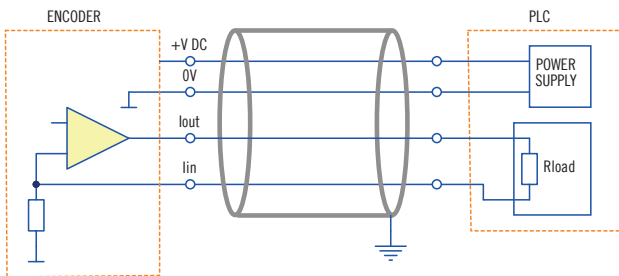

3 / 4 wire source  
with 3 wires interface lin is internally connected to 0V

**MECHANICAL SPECIFICATIONS**

Bore diameter	$\phi$ 14 / 15 mm $\phi$ 6* / 8* / 9,52 (3/8")* / 10* / 11* / 12* mm * with optional shaft adapter, please refer to Accessories
Enclosure rating IEC 60529	X = IP 65 shaft side / IP67 cover side S = IP 67
Max rotation speed	see table
Max shaft load <sup>4</sup>	200 N (45 lbs) axial / 60 N (13,49 lbs) radial
Shock	50 G, 11 ms (IEC 60068-2-27)
Vibration	10 G, 10 ... 2000 Hz (IEC 60068-2-6)
Moment of inertia	$5 \times 10^{-6}$ kgm <sup>2</sup> (119 x 10 <sup>-6</sup> lbf <sup>2</sup> )
Starting torque (at +20°C / +68°F)	< 0,03 Nm (4,25 Ozin)
Bearing stage material	aluminum
Shaft material	stainless steel
Housing material	painted aluminium
Bearings	n.2 ball bearings
Bearings life	10 <sup>9</sup> revolutions
Operating temperature <sup>5, 6</sup>	-20° ... +85°C (-4° ... +185°F)
Storage temperature <sup>6</sup>	-20° ... +85°C (-4° ... +185°F)
Weight	approx 350 g (12,35 oz)

<sup>1</sup> as measured at the transducer without cable influences  
<sup>2</sup> for further details refer to OUTPUT LEVELS on TECHNICAL BASICS section  
<sup>3</sup> this product is not a safety component, for further details refer to TECHNICAL BASICS section  
<sup>4</sup> maximum load for static usage  
<sup>5</sup> measured on the transducer flange  
<sup>6</sup> condensation not allowed

**ROTATION SPEED / TEMPERATURE TABLE**


	Temperature °C (°F)	Max speed (rpm)	Max continuous speed (rpm)
IP65	up to +70 (+158)	9000	6000
	+70 ... +85 (+158 ... +185)	6000	3000
IP67	up to +70 (+158)	8000	4000
	+70 ... +85 (+158 ... +185)	4000	2000

**CONNECTIONS**

Function	Cable	5 pin M12	8 pin M12*
+ V DC	red	2	2
0 V	black	3	3
Vout / Iout	green	1	1
Iin	yellow	/	6
BEGIN	white	4	4
END	brown or grey	5	5
Shield	shield	housing	housing

\* with Q current output

M12 connector (5 pin)  
M12 A coded front view



M12 connector (8 pin)  
M12 A coded front view

