

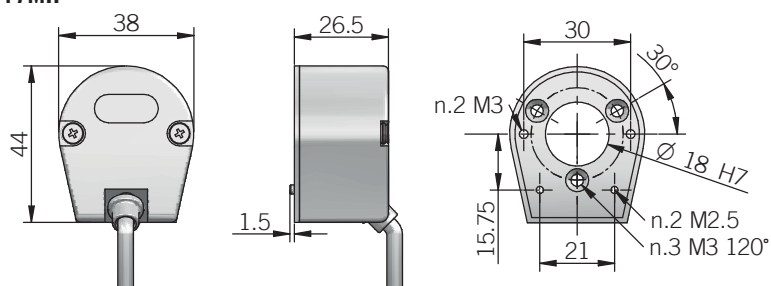
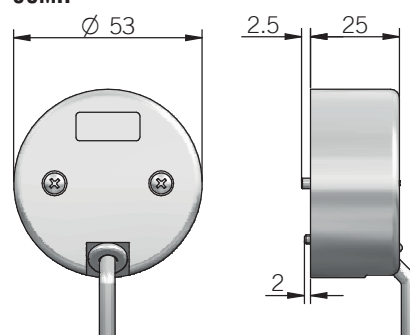
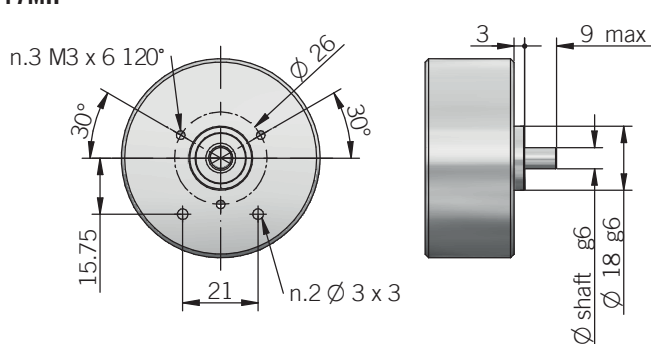
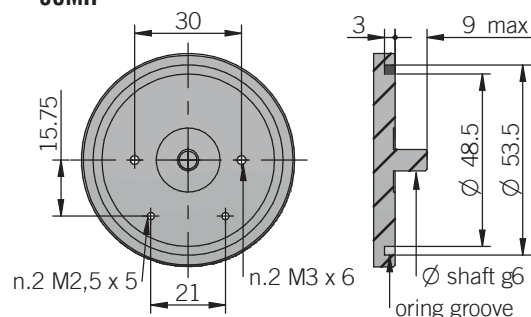
**MAIN FEATURES**

Series of miniaturized encoders with high resolution for integration on small size AC/DC motors, stepper motors or for limited size applications.

- 3 channel encoder (A / B / Z) up to 5000 ppr
- Power supply up to +30 V DC with several electrical interfaces available
- Up to 500 kHz output frequency
- No wear due to absence of bearings
- Easy assembly
- Compact size



ORDERING CODE	EH	30MH	2000	S	5/30	P	6	X	X	PR	.XXX
<p><b>SERIES</b> incremental encoder series <b>EH</b></p> <p><b>TYPE</b> high resolution kit encoder with flange <b>17MH</b> high resolution kit encoder <b>30MH</b></p> <p><b>RESOLUTION</b> ppr <b>2000 / 2048 / 2500 / 4096 / 5000</b></p> <p><b>ZERO PULSE</b> without zero pulse <b>S</b> with zero pulse <b>Z</b></p> <p><b>POWER SUPPLY</b> 5 ...30 V DC <b>5/30</b></p> <p><b>ELECTRICAL INTERFACE</b> push-pull <b>P</b> line driver <b>L</b> power supply 5/30 V DC - output RS-422 <b>RS</b></p> <p><b>BORE DIAMETER</b> mm <b>6</b> (1/4") mm <b>6,35</b></p> <p><b>ENCLOSURE RATING</b> (mod. 17MH) IP40 - (mod. 30MH) IP 54 <b>X</b></p> <p><b>OPTION</b> to be reported <b>X</b></p> <p><b>OUTPUT TYPE</b> radial cable (standard length 0,5 m) <b>PR</b> preferred cable lengths 1,5 / 2 / 3 / 5 / 10 m, to be added after OUTPUT TYPE (eg. PR5)</p> <p><b>VARIANT</b> custom version <b>XXX</b></p>											

**17MH**

**30MH**

**RECOMMENDED INTERFACE FLANGE DESIGN**
**17MH**

**30MH**


dimensions in mm

**ELECTRICAL SPECIFICATIONS**

<b>Resolution</b>	2000 - 2048 - 2500 - 4096 - 5000 ppr
<b>Power supply<sup>1</sup></b>	4,5 ... 30 V DC (reverse polarity protection)
<b>Current consumption without load</b>	60 mA max
<b>Max load current</b>	20 mA / channel
<b>Electrical interface<sup>2</sup></b>	push-pull / line driver HTL (AEIC-7272 or similar) line driver RS-422 (AELT-5000 or similar)
<b>Max output frequency</b>	500 kHz
<b>Counting direction</b>	A leads B clockwise (shaft view)
<b>Index signal</b>	90°e (gated A&B)
<b>Mean time to dangerous failure (MTTF)<sup>3</sup></b> according to EN ISO 13849-1	289 years
<b>Mission time (Tm)<sup>3</sup></b>	20 years
<b>Diagnostic coverage (DC)<sup>3</sup></b>	0%
<b>Cable type</b>	shielded - fixed installation conductors section 0,22 mm <sup>2</sup> /AWG 24 bending radius min 60 mm
<b>Electromagnetic compatibility</b>	according to 2014/30/EU directive
<b>RoHS</b>	according to 2011/65/EU directive
<b>UL / CSA</b>	file n. E212495

<sup>1</sup> as measured at the transducer without cable influences

<sup>2</sup> for further details refer to OUTPUT LEVELS on TECHNICAL BASICS section

<sup>3</sup> this product is not a safety component, for further details refer to TECHNICAL BASICS section

<sup>4</sup> measured on the transducer flange

<sup>5</sup> condensation not allowed

**MECHANICAL SPECIFICATIONS**

<b>Bore diameter</b>	Ø 6 / 6,35 (1/4") mm
<b>Enclosure rating IEC 60529</b>	mod. 17 IP 40 mod. 30 IP 40 or 54*
<b>Max rotation speed</b>	6000 rpm limited by output frequency
<b>Shock</b>	50 G, 11 ms (IEC 60068-2-27)
<b>Vibration</b>	10 G, 10 ... 2000 Hz (IEC 60068-2-6)
<b>Moment of inertia</b>	0,5 x 10 <sup>-6</sup> kgm <sup>2</sup> (12 x 10 <sup>-6</sup> lbf <sup>2</sup> )
<b>Flange material (mod. 17)</b>	aluminium
<b>Hub material</b>	aluminium
<b>Cover material</b>	PA66 / PA6 glass fiber reinforced
<b>Shaft radial play allowed</b>	± 0,04 mm
<b>Shaft axial play allowed</b>	± 0,1 mm
<b>Operating temperature<sup>4,5</sup></b>	-20° ... +85°C (-4° ... +185°F)
<b>Storage temperature<sup>5</sup></b>	-25° ... +85°C (-13° ... +185°F)
<b>Weight</b>	50 g (1,76 oz)

\*when properly installed with oring kit (not supplied, please refer to Accessories)

**CONNECTIONS**

Function	Cable P	Cable L / RS
+V DC	red	red
0 V	black	black
A+	green	green
A-	/	brown or grey
B+	yellow	yellow
B-	/	orange
Z+	blue	blue
Z-	/	white
⊥	shield	shield