

# EAMR 58 B / C - 63 A / D / E BIT PARALLEL - SSI

## SOLID SHAFT MULTITURN ABSOLUTE ENCODER

### MAIN FEATURES

Industry standard multiturn absolute encoder for factory automation applications.

- Optical sensor technology (proprietary OptoASIC + Energy Harvesting)
- Resolution up to 65 bit (25 bit single turn + 40 bit multiturn)
- Power supply up to +30 VDC with Bit Parallel or SSI as electrical interface
- Cable or connector output
- Solid shaft diameter up to 10 mm
- Mounting by synchronous, clamping or centering 2,5" square flange




ORDERING CODE	EAMR	63A	12 / 12	G	8/30	P	P	X	10	X	MA	R	.162	+XXX
<b>SERIES</b> multiturn absolute encoder	<b>EAMR</b>													
<b>MODEL</b> synchronous flange ø 31.75 mm synchronous flange ø 50 mm clamping flange ø 36 mm centering square flange ø 31.75 mm centering square flange ø 50 mm	<b>63A</b>	<b>58B</b>	<b>58C</b>	<b>63D</b>	<b>63E</b>									
<b>MULTITURN RESOLUTION</b> bit from 1 to 12														
<b>SINGLETURN RESOLUTION</b> bit from 1 to 13														
<b>CODE TYPE</b> binary gray				<b>B</b>	<b>G</b>									
<b>POWER SUPPLY</b> 8 ... 30 V DC					<b>8/30</b>									
<b>ELECTRICAL INTERFACE</b> push-pull						<b>P</b>								
<b>LOGIC</b> negative positive							<b>N</b>	<b>P</b>						
<b>OPTIONS</b> to be reported if not used latch reset with external input latch / reset with external inputs									<b>X</b>	<b>L</b>	<b>ZE</b>	<b>LZE</b>		
<b>SHAFT DIAMETER</b> (mod. 58 B) mm (mod. 63 A / D) 3/8" - mm (mod. 58 C - 63 A / D / E) mm									<b>6</b>	<b>9,52</b>	<b>10</b>			
<b>ENCLOSURE RATING</b> IP 65 shaft side / IP67 cover side IP 67									<b>X</b>	<b>S</b>				
<b>OUTPUT TYPE</b> (up to 13 bit as total resolution, without reset option) 16 cores cable (standard length 1,5 m) (from 14 to 25 bit as total resolution or options) 32 cores cable (standard length 1,5 m) preferred cable lengths 2 / 3 / 5 / 10 m, to be added after DIRECTION TYPE (eg. PDR5) (up to 13 bit as total resolution, without reset option) 19 pin MIL plug connector (from 14 to 25 bit as total resolution) 32 pin MIL plug connector													<b>PD</b>	<b>PE</b>
<b>DIRECTION TYPE</b> radial														<b>R</b>
<b>SOCKET</b> socket not included to be reported only with connector output (eg. MAR.162), for socket see Accessories													<b>.162</b>	
<b>VARIANT</b> custom version														<b>XXX</b>

ORDERING CODE SSI	EAMR	63A	12 / 13	G	8/30	S	X	2048	RS	10	X	HA	R	.162	+XXX
<b>SERIES</b> multiturn absolute encoder <b>EAMR</b>															
<b>MODEL</b> synchronous flange ø 31.75 mm <b>63A</b> synchronous flange ø 50 mm <b>58B</b> clamping flange ø 36 mm <b>58C</b> centering square flange ø 31.75 mm <b>63D</b> centering square flange ø 50 mm <b>63E</b>															
<b>MULTITURN RESOLUTION</b> bit <b>12 / 14 / 15</b> see table for preferred combinations															
<b>SINGLETURN RESOLUTION</b> bit <b>13 / 18 / 25</b> see table for preferred combinations															
<b>CODE TYPE</b> binary <b>B</b> gray <b>G</b>															
<b>POWER SUPPLY</b> 8 ... 30 V DC <b>8/30</b>															
<b>ELECTRICAL INTERFACE</b> Serial Synchronous Interface - SSI <b>S</b>															
<b>OPTION</b> to be reported if not used <b>X</b> reset with external input <b>ZE</b> reset on cover or with external input <b>ZP</b>															
<b>INCREMENTAL RESOLUTION</b> (powers of 2) ppr from <b>128</b> to <b>8192</b>															
<b>INCREMENTAL ELECTRICAL INTERFACE</b> available with PD or HA output type line driver HTL <b>L</b> push pull <b>P</b> line driver RS-422 <b>RS</b>															
<b>SHAFT DIAMETER</b> (mod. 58 B) mm <b>6</b> (mod. 63 A / D) 3/8" - mm <b>9,52</b> (mod. 58 C - 63 A / D / E) mm <b>10</b>															
<b>ENCLOSURE RATING</b> IP 65 shaft side / IP67 cover side <b>X</b> IP 67 <b>S</b>															
<b>OUTPUT TYPE</b> cable (standard length 1.5 m) <b>PC</b> preferred cable lengths 2 / 3 / 5 / 10 m, to be added after DIRECTION TYPE (eg. PCR5) cable (standard length 1.5 m) <b>PD</b> preferred cable lengths 2 / 3 / 5 / 10 m, to be added after DIRECTION TYPE (eg. PCR5) (without reset option) 7 pin MIL plug connector <b>MC</b> (with reset option) 10 pin MIL plug connector <b>MD</b> 12 pin M23 plug connector <b>HA</b> 8 pin M12 plug connector <b>M12</b>															
<b>DIRECTION TYPE</b> radial <b>R</b>															
<b>SOCKET</b> socket not included <b>.162</b> to be reported only with connector output (eg. HAR.162), for socket see Accessories															
<b>VARIANT</b> custom version <b>XXX</b>															


only with additional incremental output

63A

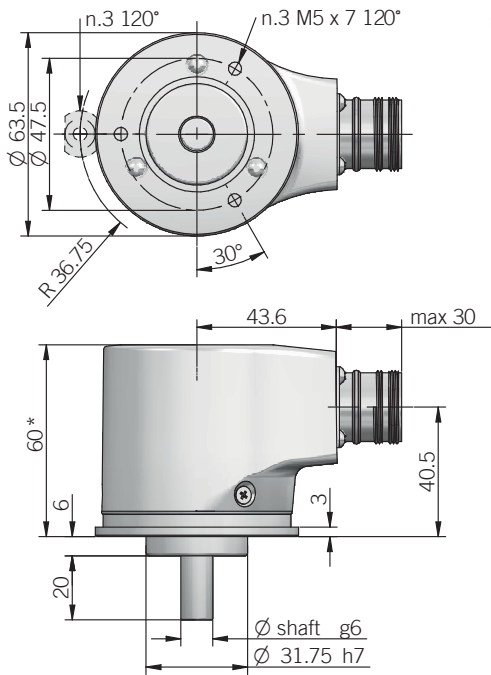


for fixing clamps please refer to Accessories

58B

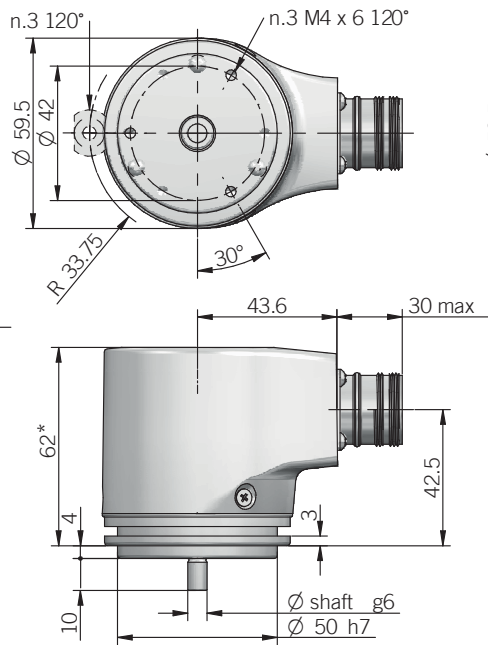


for fixing clamps please refer to Accessories


58C

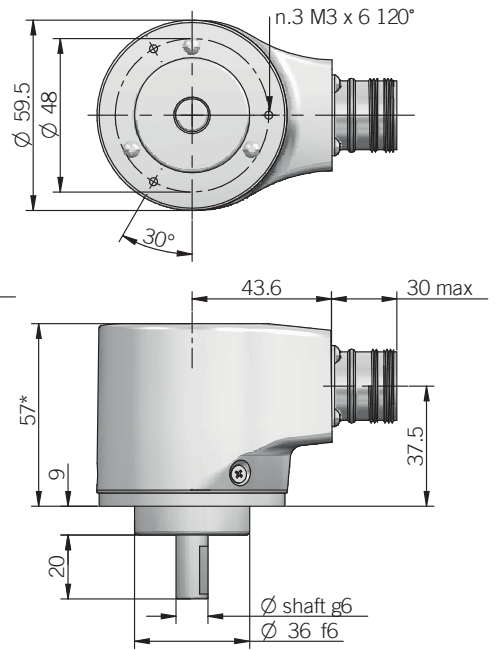

63D

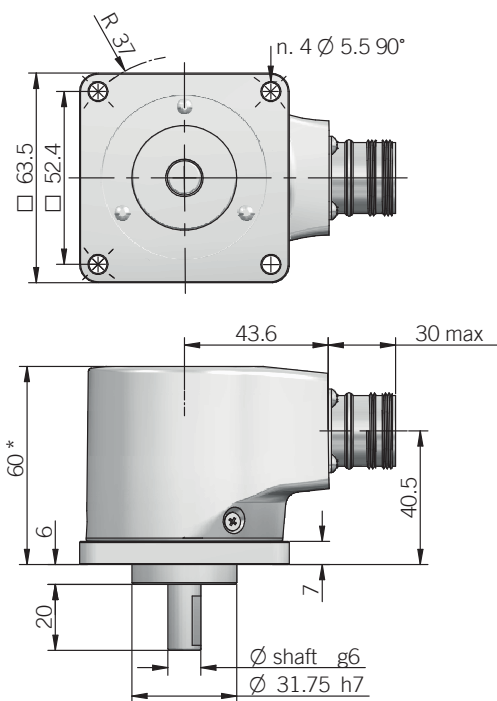

63E

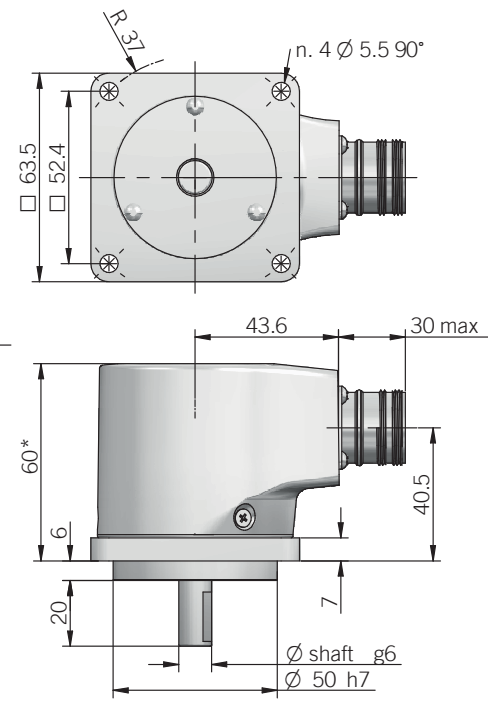

\* with option ZP +1,5 mm  
recommended mating shaft tolerance H7  
dimensions in mm


**BIT PARALLEL CONNECTIONS**

Function	Binary / Gray	Cable PD	Cable PE	19 pin MA	32 pin ME
bit 1 (LSB)	B <sup>0</sup> / G <sup>0</sup>	green	green	A	A
bit 2	B <sup>1</sup> / G <sup>1</sup>	yellow	yellow	B	B
bit 3	B <sup>2</sup> / G <sup>2</sup>	blue	blue	C	C
bit 4	B <sup>3</sup> / G <sup>3</sup>	brown	brown	D	D
bit 5	B <sup>4</sup> / G <sup>4</sup>	orange or pink	orange or pink	E	E
bit 6	B <sup>5</sup> / G <sup>5</sup>	white	white	F	F
bit 7	B <sup>6</sup> / G <sup>6</sup>	grey	grey	G	G
bit 8	B <sup>7</sup> / G <sup>7</sup>	purple	purple	H	H
bit 9	B <sup>8</sup> / G <sup>8</sup>	grey / pink	grey / pink	J	J
bit 10	B <sup>9</sup> / G <sup>9</sup>	white / green	white / green	K	K
bit 11	B <sup>10</sup> / G <sup>10</sup>	brown / green	brown / green	L	L
bit 12	B <sup>11</sup> / G <sup>11</sup>	white / yellow	white / yellow	M	M
bit 13	B <sup>12</sup> / G <sup>12</sup>	yellow / brown	yellow / brown	N	N
bit 14	B <sup>13</sup> / G <sup>13</sup>	/	white / grey	/	P
bit 15	B <sup>14</sup> / G <sup>14</sup>	/	grey / brown	/	R
bit 16	B <sup>15</sup> / G <sup>15</sup>	/	white / pink	/	S
bit 17	B <sup>16</sup> / G <sup>16</sup>	/	pink / brown	/	T
bit 18	B <sup>17</sup> / G <sup>17</sup>	/	white / blue	/	U
bit 19	B <sup>18</sup> / G <sup>18</sup>	/	brown / blue	/	V
bit 20	B <sup>19</sup> / G <sup>19</sup>	/	white / red	/	W
bit 21	B <sup>20</sup> / G <sup>20</sup>	/	brown / red	/	X
bit 22	B <sup>21</sup> / G <sup>21</sup>	/	white / black	/	Y
bit 23	B <sup>22</sup> / G <sup>22</sup>	/	brown / black	/	Z
bit 24	B <sup>23</sup> / G <sup>23</sup>	/	grey / green	/	a
bit 25	B <sup>24</sup> / G <sup>24</sup>	/	yellow / pink	/	b
LATCH	/	/	yellow / grey	R	e
0 V	/	black	black	T	j
U / D	/	red / blue	red / blue	U	g
RESET	/	/	pink / green	/	f
+ V DC	/	red	red	V	h
⊥	/	shield	shield	S	housing


**SSI CONNECTIONS**

Function	Cable PC	Cable PD	7 pin MC	10 pin MD	12 pin HA	12 pin HA	8 pin M12
+ V DC	red	red	G	G	8	8	8
0 V	black	black	F	F	1	1	5
DATA +	green	green	C	C	2	2	3
DATA -	brown	brown	D	D	10	10	2
CLOCK +	yellow	yellow	A	A	3	3	4
CLOCK -	orange or pink	orange or pink	B	B	11	11	6
A+	/	grey	/	/	/	6	/
A-	/	blue	/	/	/	7	/
B+	/	purple	/	/	/	9	/
B-	/	white / green	/	/	/	12	/
U / D	red / blue	red / blue	E	E	5	5	7
RESET	white	white	/	H	4	4	1
⊥	shield	shield	housing	housing	9	housing	housing

MC connector (7 pin)  
Amphenol MS3102-E-16-S  
front view




MD connector (10 pin)  
Amphenol MS3102-E-18-1P  
front view



HA connector (12 pin) - M23 CCG  
Hummel 7.410.000000 - 7.002.912.603  
front view



MA connector (19 pin)  
Amphenol 621N 12E 14-19 P  
front view



ME connector (32 pin)  
Glenair IPT 02 A 18-32 P F6  
front view



M12 connector (8 pin)  
M12 A coded  
front view




ELECTRICAL SPECIFICATIONS	
<b>Multiturn resolution</b>	12 / 14 / 15 bit please directly contact our offices for other pulses
<b>Singleturn resolution</b>	P = from 1 to 13 bit S = preferred combinations 12 multiturn / 13 singleturn 14 multiturn / 18 singleturn 15 multiturn / 25 singleturn please directly contact our offices for other pulses
<b>Power supply<sup>1</sup></b>	7,6 ... 30 V DC (reverse polarity protection)
<b>Power draw without load</b>	< 1 W
<b>Max load current</b>	20 mA / channel
<b>Absolute electrical interface<sup>2</sup></b>	P = push pull (iC-DL) S = RS-422 (THVD1451 or similar)
<b>Incremental electrical interface<sup>2</sup></b>	L = HTL differential (AEIC-7272 or similar) P = Push-Pull (AEIC-7272 or similar) RS = RS-422 (AELT-5000 or similar)
<b>Max incremental output frequency</b>	128 kHz
<b>Auxiliary inputs (U/D - RESET - LATCH)</b>	active high (+V DC) connect to 0 V if not used / RESET - LATCH $t_{min}$ 150 ms
<b>Max frequency</b>	50 kHz LSB (Bit Parallel) clock input 100 kHz ... 1 MHz (SSI)
<b>Code type</b>	binary or gray
<b>Logic</b>	SSI = positive Bit parallel = positive or negative
<b>SSI monostable time (Tm)</b>	20 $\mu$ s
<b>SSI pause time (Tp)</b>	> 35 $\mu$ s
<b>SSI frame</b>	tree format MSB ... LSB up to 12 bit multiturn = length 25 bit (12MT + 13ST) 14 bit multiturn = length 32 bit (14MT + 18ST) 15 bit multiturn = length 40 bit (15MT + 25ST)
<b>SSI status and parity bit</b>	on request
<b>Counting direction</b>	decreasing clockwise (shaft view)
<b>Start-up time</b>	700 ms
<b>Accuracy</b>	$\pm 0,069^\circ$
<b>Mean time to dangerous failure (MTTF)<sup>3</sup> according to EN ISO 13849-1</b>	156 years with BIT PARALLEL output 186 years with SSI/INCREMENTAL output
<b>Mission time (Tm)<sup>3</sup></b>	20 years
<b>Diagnostic coverage (DC)<sup>3</sup></b>	0%
<b>Cable type PC</b>	shielded - fixed installation conductors section 0,22 mm <sup>2</sup> / AWG 24 bending radius min 60 mm
<b>Cable type PD</b>	shielded - fixed installation conductors section 0,14 mm <sup>2</sup> / AWG 26 bending radius min 50 mm
<b>Cable type PE</b>	shielded - fixed installation conductors section 0,14 mm <sup>2</sup> / AWG 26 bending radius min 50 mm
<b>Electromagnetic compatibility</b>	according to 2014/30/EU directive
<b>RoHS</b>	according to 2011/65/EU directive
<b>UL / CSA</b>	file n. E212495

ROTATION SPEED DERATING TABLE		
Temperature °C (°F)	Max speed (rpm)	Max continuous speed (rpm)
up to +70 (+158)	10000	8000
+70 ... +85 (+158 ... +185)	8000	5000
+85 ... +100 (+185 ... 212)	5000	3000

MECHANICAL SPECIFICATIONS	
<b>Shaft diameter</b>	$\varnothing 6 / 9,52 (3/8") / 10$ mm
<b>Enclosure rating IEC 60529</b>	X = IP 65 shaft side / IP67 cover side S = IP 67
<b>Max rotation speed</b>	see table
<b>Max shaft load<sup>4</sup></b>	200 N (45 lbs) axial / 70 N (15,74 lbs) radial
<b>Shock</b>	50 G, 11 ms (IEC 60068-2-27)
<b>Vibration</b>	10 G, 10 ... 2000 Hz (IEC 60068-2-6)
<b>Moment of inertia</b>	$1,5 \times 10^{-6}$ kgm <sup>2</sup> ( $36 \times 10^{-6}$ lbf <sup>2</sup> )
<b>Starting torque (at +20°C / +68°F)</b>	< 0,03 Nm (4,25 Ozin)
<b>Bearing stage material</b>	aluminium
<b>Shaft material</b>	stainless steel
<b>Housing material</b>	painted aluminium
<b>Bearings</b>	n.2 ball bearings
<b>Bearings life</b>	10 <sup>9</sup> revolutions
<b>Operating temperature Bit parallel<sup>5, 6</sup></b>	-20° ... +85°C (-4 ... +185°F)
<b>Operating temperature SSI<sup>5, 6</sup></b>	-40° ... +100°C (-40° ... +212°F) -20° ... +100°C (-4° ... +212°F) with PC cable output -20° ... +85°C (-4° ... +185°F) with PD cable output -25° ... +85°C (-13° ... +185°F) with M12 connector
<b>Storage temperature<sup>6</sup></b>	-20° ... +85°C (-4° ... +185°F)
<b>Weight</b>	approx 300 g (10,58 oz)

<sup>1</sup> as measured at the transducer without cable influences  
<sup>2</sup> for further details refer to OUTPUT LEVELS on TECHNICAL BASICS section  
<sup>3</sup> this product is not a safety component, for further details refer to TECHNICAL BASICS section  
<sup>4</sup> maximum load for static usage  
<sup>5</sup> measured on the transducer flange  
<sup>6</sup> condensation not allowed

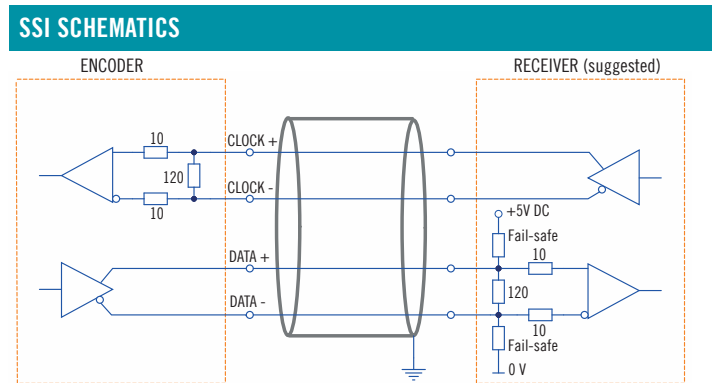

BIT PARALLEL CONNECTOR OR CABLE CHOICE	
According to the resolution and the chosen number of turns is possible to calculate the connections required by the connector or the cable. See below examples:	
<b>EXAMPLE 1</b> Singleturn = 8 bit = 8 connections Multiturn = 5 bit = 5 connections Total connections 13	<b>EXAMPLE 2</b> Singleturn = 12 bit = 12 connections Multiturn = 12 bit = 12 connections Total connections 24

From 1 to 13 connections a 16 cores cable (PD) or a 19 pin connector (MA) is required.  
 From 14 to 25 connections a 32 cores cable (PE) or a 32 pin connector (ME) is required.  
 With LATCH option a 32 cores cable (PE) or a 19 pin connector (MA) or a 32 pin connector (ME) is required.  
 With RESET option a 32 cores cable (PE) or a 32 pin connector (ME) is required.